
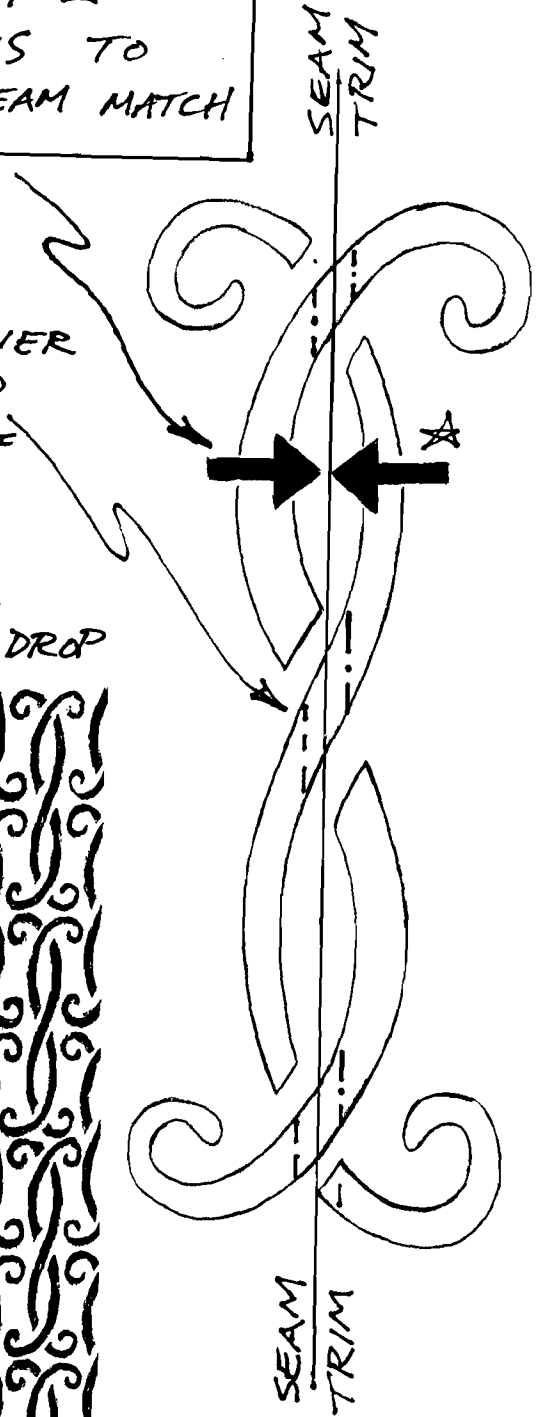


★ DUE TO THE HAND MADE NATURE OF THIS PAPER, A CERTAIN SEAM ALIGNMENT MUST BE FOLLOWED TO ACHIEVE PROPER SEAM ALIGNMENT.

FOR PROPER SEAM ALIGNMENT -  
★ USE ARROWS TO LINE UP SEAM MATCH

HANG PANELS, THEN DOUBLE CUT SEAM.

DESIGN CARRY OVER PROVIDED TRIM OFF

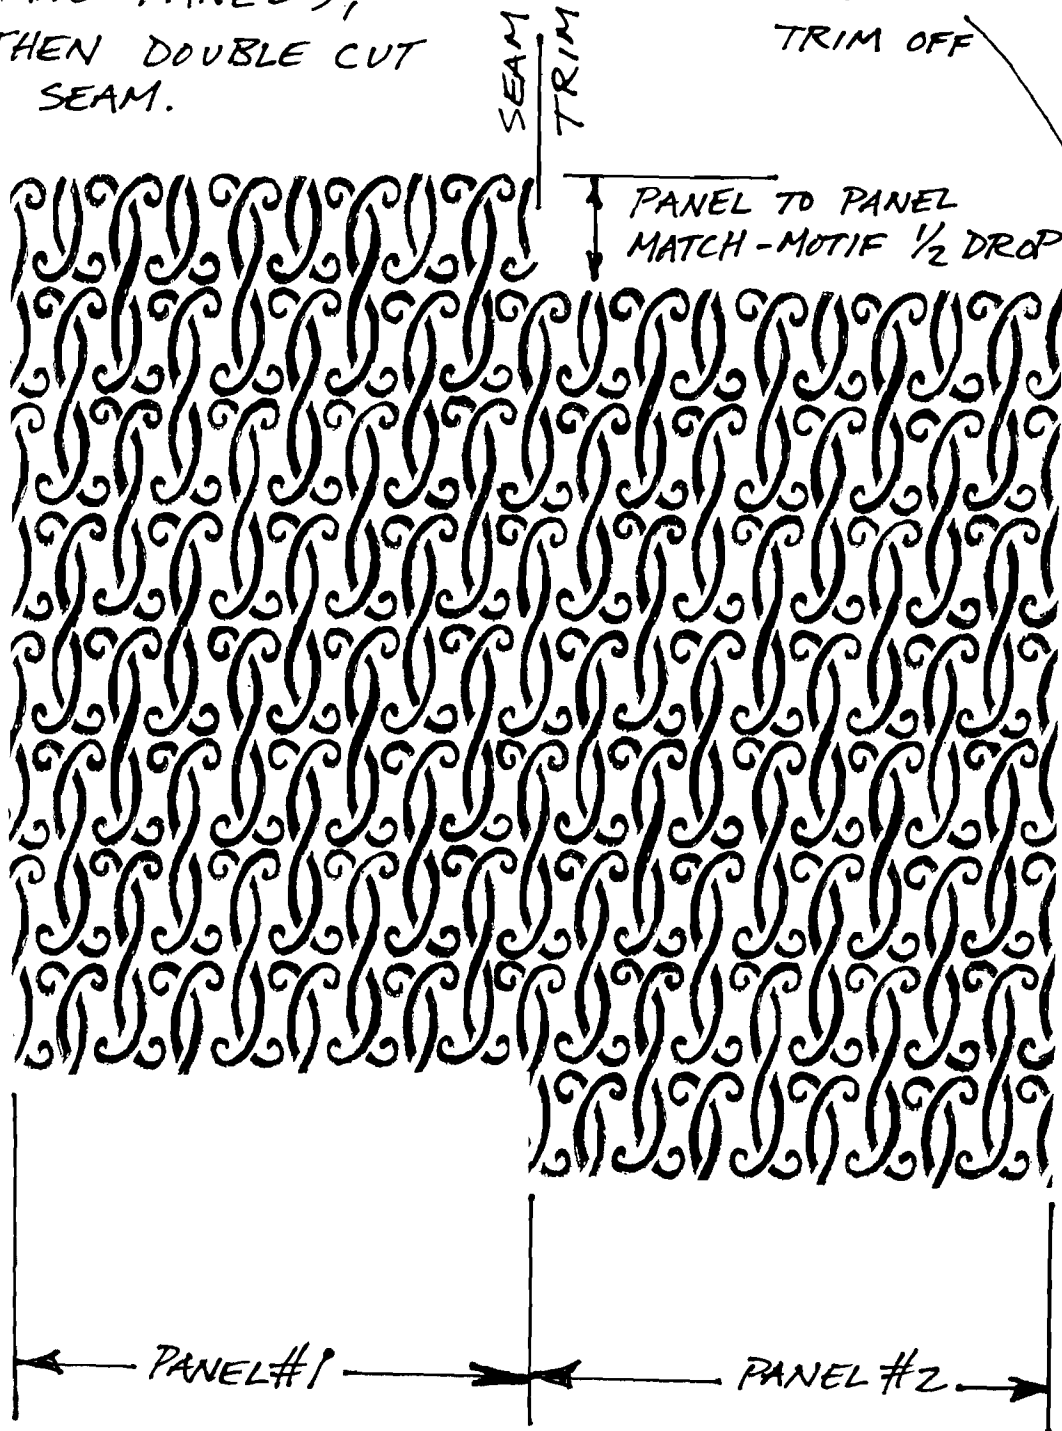

# “ LYRIC ”

Thank you for purchasing this unique hand-crafted wallpaper. This wallpaper is made entirely by hand and has been designed with an inherent variation of shading and irregularity. This includes variation in the depth of the embossed texture. These are not considered defects; rather, they are the beauty of a hand-made product. Note: Fingerprints on the edges of the paper are not defects, the edges will be trimmed off in the installation process.

**Please read these instructions thoroughly before beginning installation.**

Please keep the wallpaper stored in an upright position to avoid compression dents. The repeat of the wallpaper is **22 inches** with a **Half Drop Match**. This paper will panel slightly, but that is not considered a defect.

This wallpaper is 30 inches wide and is **NOT pre-trimmed**. For best results, overlap the selvages and double cut directly on the wall. The pattern crosses over the seam in several areas: Because this is a hand made paper, there is a certain alignment that must be followed for the pattern to match at the seam. Look for 2 arrows located at each edge of the paper. Line these up as you hang the panels. This will give you the alignment you need for a good seam splice of the helix motif, (refer to diagram on back side). Carry over is provided on the seam edge of the helix motif, so you will be overlapping and trimming into the design approximately 3/16". The finished width of the paper should be approx. 27 inches wide, however, you can make adjustments up to 1/16 inch vertically or horizontally to achieve the best match. We advise using a level to keep the pattern from drifting diagonally. Use a heavy-duty blade to cut this wallpaper, and replace the blade often to ensure the best cut.

Walls must be properly primed and prepared before hanging wallpaper. "Shieldz" is a good wallpaper base primer. Primer helps adhesion and makes the removal of the wallpaper easier when necessary. Use only a pre-mixed clear vinyl adhesive such as Roman Adhesive PRO-880. You may paste the wall if you prefer. **DO NOT** allow paste to dry on the front of the paper. This will discolor the ink over time. Remove any paste with a clean, damp (NOT WET) sponge and rinse again. Do not allow water to remain on the surface of the paper for a prolonged period of time. Avoid using sharp metal tools to install this paper, which may also gouge and scratch the surface. Do not overwork the seams. Add a little extra paste to the back of the seams to ensure that they seal well and lay flat.

**The environmental lighting of your installation may create an illusion of shading due to the light reflective quality of the pearlescent and metallic inks.**

## RETURNS

Test hang 3 strips of paper. If any defects are found, do not install the wallpaper. Return the entire shipment to us for inspection. No adjustments will be made until we have inspected the returned wallpaper. If found by us to be defective, we will make prompt adjustments. If we determine that the goods are not defective, we will charge a 25% restocking fee. **Be sure that what you see as a defect is not an inherent irregularity or the textured effect of this hand-made wallcovering.** We are not responsible for cut or hung material or labor charges. **No returns or will be accepted after 30 days from ship date.** **ABSOLUTELY NO CLAIMS OR ADJUSTMENTS AFTER MORE THAN 3 STRIPS OF PAPER HAS BEEN HUNG.**

**TO CLEAN: Wipe surface gently with a damp cloth and mild detergent.**

**This paper is NOT resistant to harsh chemicals and abrasion**