


PANEL #1

SEAM  
TRIM

PANEL #2

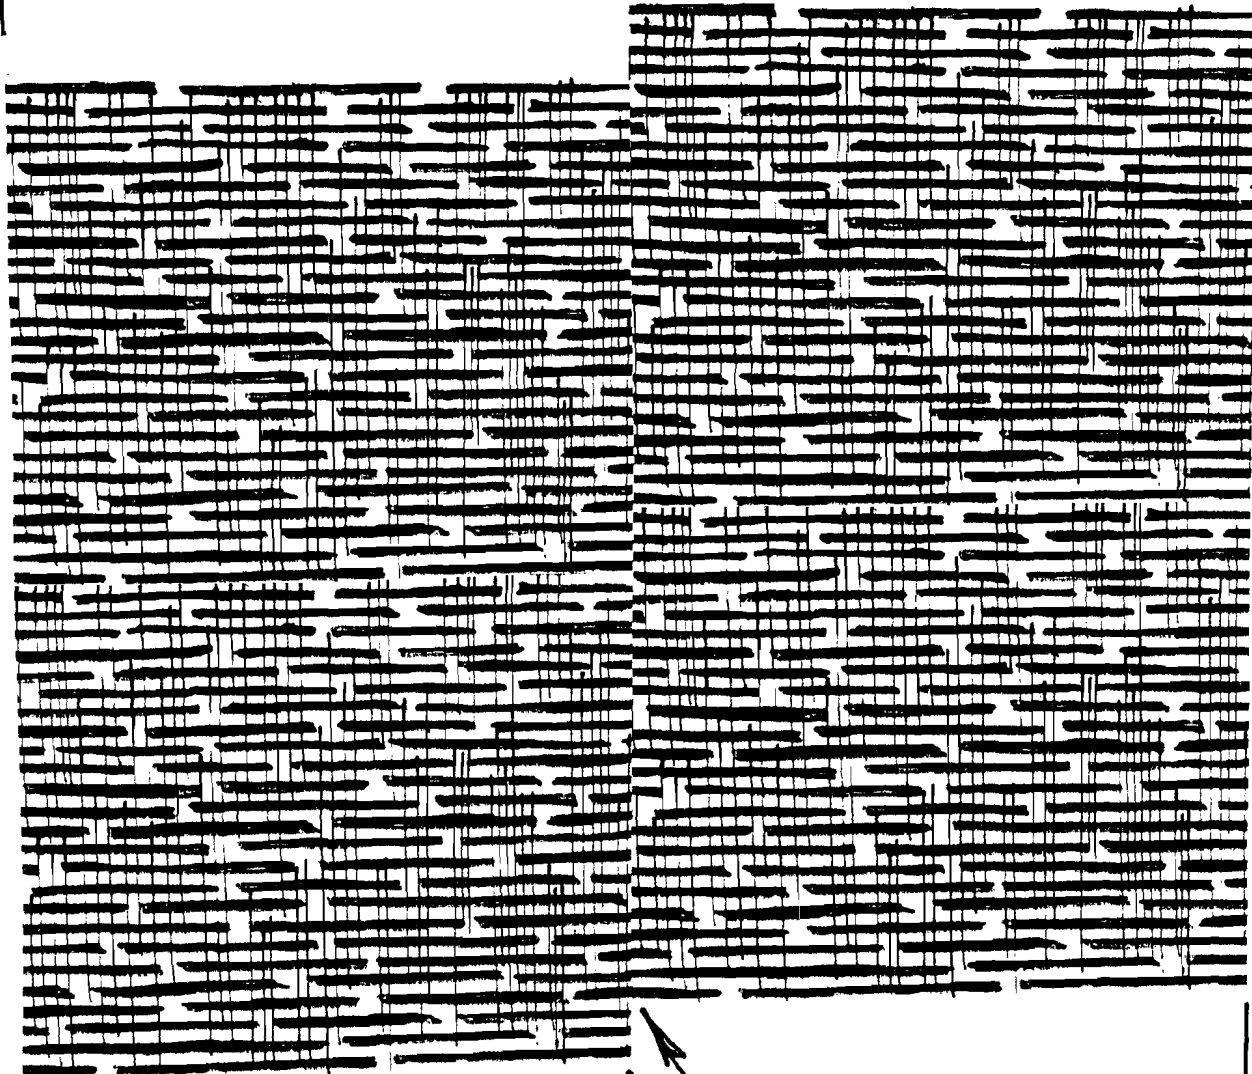

1) PASTE PANELS  
TO WALL

2) OVERLAP SEAM

3) DOUBLE CUT/TRIM SEAM

SEAM  
TRIM

RANDOM MATCH  
(SIMILAR TO  
NATURAL GRASSCLOTH)

# “ZEN”

Thank you for purchasing this unique hand-crafted wallpaper. This wallpaper is made entirely by hand and has been designed with an inherent variation of shading and irregularity. This includes variation in the depth of the embossed texture. These are not considered defects; rather, they are the beauty of a hand-made product. Note: Fingerprints on the edges of the paper are not defects, the edges will be trimmed off in the installation process.

***Please read these instructions thoroughly before beginning installation.***

Please keep the wallpaper stored in an upright position to avoid compression dents. The repeat of the wallpaper is 13 1/2” with a **random match**.

This wallcovering is 30” Wide and is **not** pre-trimmed. For best results, overlap the panel edges into the design by approximately 1 1/2 “ on each side and then double cut seam. The finished panel width should be 27” wide. Because this is a handmade product, the selvages may not be even and trim width may vary slightly from sheet to sheet. It is not necessary to line up the 13 1/2 “ repeat, Generally, trim with a straight edge using a heavy-duty blade to cut this wallcovering. Replace the blade often to ensure the best cut. When the selvages are placed together, a horizontal effect will be created much like a natural grasscloth (see diagram on reverse side). This paper will panel slightly, but that is not considered a defect.

Walls must be properly primed and prepared before hanging wallpaper. Special attention should be given to removing any old paste. Use only a pre-mixed clear vinyl adhesive such as Roman Adhesive PRO-880. You may paste the wall if you prefer. Do not allow paste to dry on the front of the paper. This will discolor the ink over time. Remove any paste with a clean, damp (NOT WET) sponge and rinse again. Do not allow water to remain on the surface of the paper for a prolonged period of time. Avoid using metal tools to install this paper, which may also gouge and scratch the surface. Do not overwork the seams. For best results avoid getting any paste on the front of the paper entirely.

**The environmental lighting of your installation may create an illusion of shading due to the light reflective quality of the pearlescent and metallic inks.**

## RETURNS

Test hang 3 strips of paper. If any defects are found, do not install the wallpaper. Return the entire shipment to us for inspection. No adjustments will be made until we have inspected the returned wallpaper. If found by us to be defective, we will make prompt adjustments. If we determine that the goods are not defective, we will charge a 25% restocking fee. ***Be sure that what you see as a defect is not an inherent irregularity or the textured effect of this hand-made wallcovering.*** We are not responsible for cut or hung material or labor charges. ***No returns or will be accepted after 30 days from ship date. ABSOLUTELY NO CLAIMS OR ADJUSTMENTS AFTER MORE THAN 3 STRIPS OF PAPER HAS BEEN HUNG.***

**TO CLEAN:** Wipe surface gently with a damp cloth and mild detergent.  
This paper is **NOT** resistant to harsh chemicals or abrasion.